


Thank you for purchasing our NF4UK8AA-8EKRS motherboard.

To flash the motherboard BIOS on this motherboard, please follow this procedure:

1. Unplug the power cord from the power supply.
2. Remove the side cover from the system enclosure.
3. Locate Jumper "JP1" on the motherboard. Please refer to the picture below:

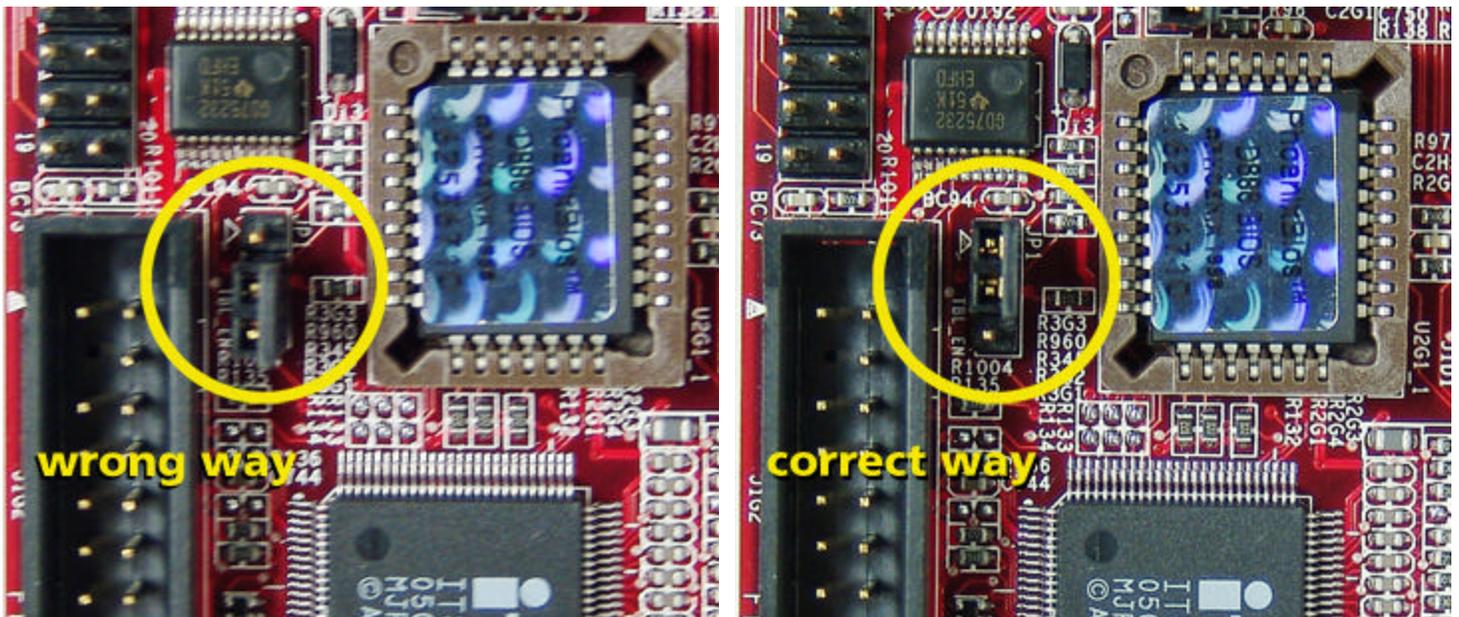

4. Jumper "JP1" needs to be changed from 2-3 to **1-2** (triangle represents pin 1) **before** you flash the motherboard. **Not doing so could result in leaving your motherboard in an unusable state.**
5. Follow the instructions provide in the "How to Flash your BIOS in DOS" pdf document.
6. Replace the side cover.
7. Reconnect the power cord.

In order to extract the BIOS from within the provided zip file, you will need to enter "**Fullerton**" (without the quotation marks) as the password.

**Note: This procedure is required EVERY time you flash the motherboard BIOS.**

**You MUST flash the motherboard BIOS via DOS using the FLASH.BAT file.** You cannot flash from within Microsoft's Windows 2000/XP using SuperUpdate or Winflash. Doing so could result in leaving your motherboard in an unusable state.